



Ref No: BCS1YE00819

DESCRIPTION


EIB/KNX Cable – 1 pair (2-core twisted pair) with 0.8 mm solid bare copper conductors, overall shielded, PVC green sheath, designed for KNX/EIB building automation systems

APPLICATION

Suitable for KNX, EIB bus systems, EHS, and building automation system installations.

CONSTRUCTION

Cores	1 Pair (2 Cores)
Diameter Conductor	0.8mm
Conductor Material	Solid Bare Copper
Insulation	Polyethylene (PE)
Colour	Black, Red
Lay Up	2 Cores twisted to a pair
Wrapping	Polyethylene terephthalate foil
Screen (100% Coverage)	Aluminium/ Polyester
Drain Wire	Solid Tinned Copper Wire
Rip Cord	Nylon Yarn
Sheath Material	Flame-Retardant Polyvinyl Chloride (PVC)
Sheath Color	RAL6018 - (Green)
Standard Put Up Length	305, 500 meters

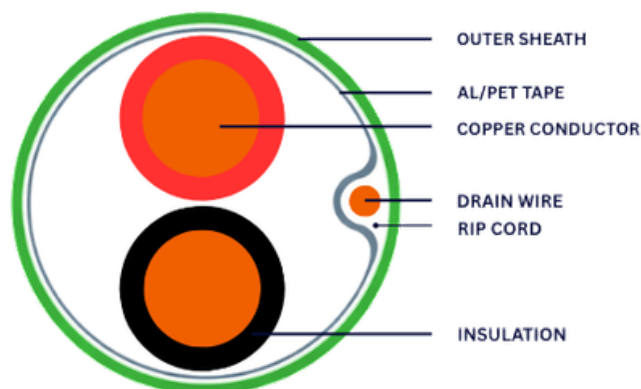

PHYSICAL & MECHANICAL CHARACTERISTICS

Operating Temperature (°C)	-25°C to +75°C
Nominal Cable Weight (kg/km)	38
Nominal Insulation Thickness (mm)	0.4
Nominal Sheath Thickness (mm)	1.2
Nominal Overall Diameter (mm)	5.15
Min. Bend Radius (install) (mm)	56
Max. Pull Tension (N)	49

ELECTRICAL CHARACTERISTICS

Max. Mutual Capacitance	99 pF/m
DC Resistance per core @ 20°C	38 Ω/km
Insulation Resistance	104 MΩ/km (min)
DC Loop Resistance	74.5 Ω/km
Inductance	0.75 μH/m
Operating Voltage	300 V (Vrms)

TECHNICAL DATA & STANDARD REFERENCES

IEC 61034, IEC 60754-1, 60754-2 UL1581
IEC 60332-1, EC 60332-2
EN 50290-2
RoHS Directives

BELFAST ACCREDITED BY :



www.belfastcables.co.uk | info@belfastcables.co.uk

Belfast Cables UK Solutions Ltd | 71-75, Shelton Street Covent Garden, London WC2H 9JQ, United Kingdom

Disclaimer: Information is believed to be accurate but may contain errors. Specifications may change without notice.



COMPANY PROFILE