



Ref No: BCS18761

DESCRIPTION :


1 Pair 22AWG stranded Tinned copper conductors with PVC insulation, Shielded and stable signal transmission, reduced electromagnetic interference, reliable performance for both residential and commercial installations.

APPLICATION :

Single Pair PVC Shielded Cables Suitable for Instrumentation, BMS , Control, Security & Audio Cables

CONSTRUCTION :

Cores	1-Pair
Section	22 AWG
Conductor Material	Stranded Tinned Copper (TC)
Insulation	Polyethylene - PE
Pair	2 Cores twisted to a pair
Colour	Black, White
Screen (100% Coverage)	Aluminium/Polyester
Drain Wire	Stranded Tinned Copper Wire
Rip Cord	Nylon Yarn
Sheath Material	Flame-Retardant Polyvinyl Chloride (PVC)
Sheath Color	Grey RAL 7001
Standard Put Up Length	305, 500 meters

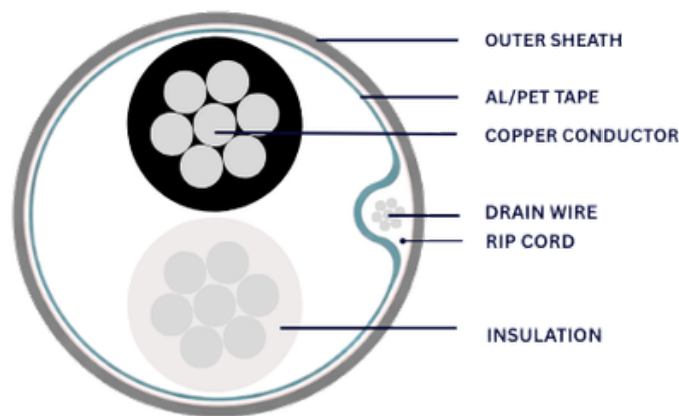

PHYSICAL & MECHANICAL CHARACTERISTICS

Operating Temperature (°C)	-25°C to +75°C
Nominal Cable Weight (kg/km)	25
Insulation Diameter (mm)	1.55
Nominal Sheath Thickness (mm)	0.8
Nominal Insulation Thickness (mm)	0.5
Nominal Overall Diameter (mm)	4.5
Min. Bend Radius (install) (mm)	45
Max. Pull Tension (N)	79

TECHNICAL DATA & STANDARD REFERENCES

(BS) EN 50290-2
IEC 60754-1 & 2, IEC 60228
IEC 61034, IEC 60332-3-24
UL 1685
RoHS Directives

ELECTRICAL CHARACTERISTICS

Capacitance Cond. To Cond.	76pF/m
Capacitance Cond. To Screen.	107pF/m
DC Resistance Conductor (Ω /km)	52.8 Ω /km
DC Resistance Screen (Ω /km)	78.6 Ω /km
Nominal Inductance	0.5 (μ H/m)
Recommended Current at 25°C	3.0 (Amps)
Operating Voltage	300 V (Vrms)

BELFAST ACCREDITED BY :



www.belfastcables.co.uk | info@belfastcables.co.uk

Belfast Cables UK Solutions Ltd | 71-75, Shelton Street Covent Garden, London WC2H 9JQ, United Kingdom

Disclaimer: Information is believed to be accurate but may contain errors. Specifications may change without notice.



COMPANY PROFILE