

BCS15104UE

DESCRIPTION :


6 Core, 14 AWG Multi Conductor cable with Stranded Bare Copper (BC) conductors, PE insulation, Overall Shielded, PVC sheath for consistent performance, signal integrity, and EMI protection.

APPLICATION :

Multi-conductor cable suitable for building management systems (BMS), instrumentation, security, and audio control/sound system applications.

CONSTRUCTION :

Cores	6 Core
Section	14AWG
Conductor Material	Stranded Bare Copper (BC)
Insulation	Polyethylene (PE)
Colour	Black, Red, White, Green, Brown, Blue
Cabling	Cores laid by twisting
Screen (100% Coverage)	Aluminium/Polyester
Drain Wire	Stranded Tinned Copper Wire
Rip Cord	Nylon Yarn
Sheath Material	Flame-Retardant Polyvinyl Chloride (PVC)
Sheath Color	Grey (RAL 7001)
Standard Put Up Length	305, 500 meters

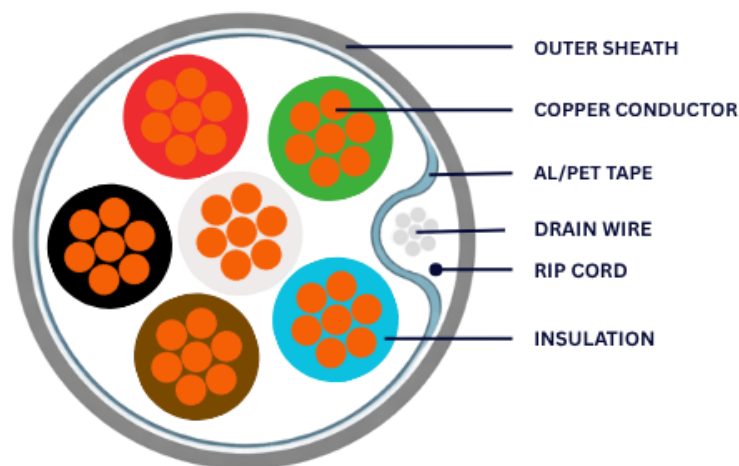

PHYSICAL & MECHANICAL CHARACTERISTICS

Operating Temperature (°C)	-25°C to +75°C
Nominal Cable Weight (kg/km)	150
Nominal Insulation Thickness (mm)	0.2
Nominal Sheath Thickness (mm)	0.3
Nominal Overall Diameter (mm)	8.8
Min. Bend Radius (install) (mm)	88
Max. Pull Tension (N)	1267

TECHNICAL DATA & STANDARD REFERENCES

(BS) EN 50290-2
IEC 60228, IEC 60332-1-2 & IEC 60332-1-3
UL 1581
RoHS Directives

ELECTRICAL CHARACTERISTICS

Capacitance Cond. To Cond.	97 pF/m
Capacitance Cond. To Screen.	177 pF/m
DC Resistance per core @ 20°C	57.5Ω/km
Max. DC Resistance Screen (Ω/km)	78.6
Max. Recommended Current @25°C	5.7 (Amps)
Inductance	0.50 μH/m
Operating Voltage	300 V (Vrms)

BELFAST ACCREDITED BY :



www.belfastcables.co.uk | info@belfastcables.co.uk

Belfast Cables UK Solutions Ltd | 71-75, Shelton Street Covent Garden, London WC2H 9JQ, United Kingdom

Disclaimer: Information is believed to be accurate but may contain errors. Specifications may change without notice.



COMPANY PROFILE