

BCS4104UE

DESCRIPTION :


6 Core, 14 AWG multi-conductor cable with Stranded Bare Copper conductors, PE insulation, and Unshielded, LSZH/HFFR sheath for enhanced fire safety, low smoke, and zero halogen emissions.

APPLICATION :

Multi-conductor cable suitable for building management systems (BMS), instrumentation, security, and audio control/sound system applications.

CONSTRUCTION :

Cores	6 Core
Section	14AWG
Conductor Material	Stranded Bare Copper (BC)
Insulation	Polyethylene (PE)
Colour	Black, Red, White, Green, Brown, Blue
Cabling	Cores laid by twisting
Rip Cord	Nylon Yarn
Sheath Material	Low Smoke Zero Halogen (LSZH/ FRNC)
Sheath Color	RAL 4005 (Purple)
Standard Put Up Length	305, 500 meters

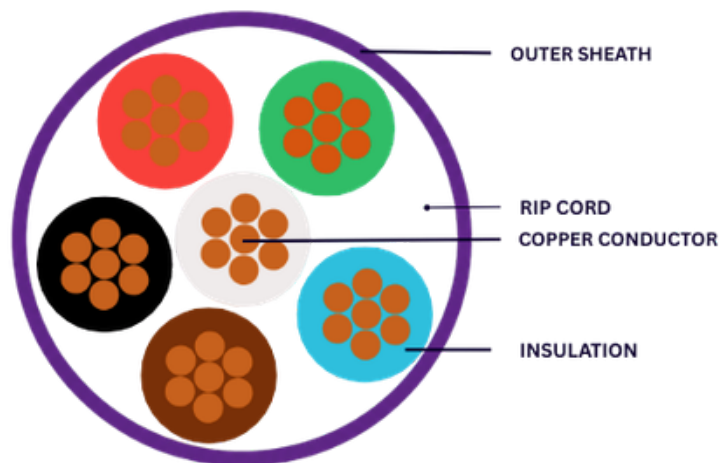

PHYSICAL & MECHANICAL CHARACTERISTICS

Operating Temperature (°C)	-25°C to +75°C
Nominal Cable Weight (kg/km)	158
Nominal Insulation Thickness (mm)	0.4
Nominal Sheath Thickness (mm)	0.66
Nominal Overall Diameter (mm)	8.8
Min. Bend Radius (install) (mm)	88
Max. Pull Tension (N)	1266

TECHNICAL DATA & STANDARD REFERENCES

IEC 60228
EN 50290-2
IEC 60332-1, IEC 60754-1/2, IEC 61034-2
UL 1685
RoHS Directives

ELECTRICAL CHARACTERISTICS

Capacitance Cond. To Cond.	52pF/m
DC Resistance Conductor (Ω/km)	9.38Ω/km
Max. Recommended Current at 25°C	6.5 (Amps)
Inductance	0.5 μH/m
Operating Voltage	300 V (Vrms)

BELFAST ACCREDITED BY :



www.belfastcables.co.uk | info@belfastcables.co.uk

Belfast Cables UK Solutions Ltd | 71-75, Shelton Street Covent Garden, London WC2H 9JQ, United Kingdom

Disclaimer: Information is believed to be accurate but may contain errors. Specifications may change without notice.



COMPANY PROFILE