

BCS15206FE

DESCRIPTION :


8 Core, 16 AWG Multi Conductor cable with Stranded Bare Copper (BC) conductors, PE insulation, overall shielding, PVC sheath for consistent performance, signal integrity, and EMI protection.

APPLICATION :

Multi-conductor cable suitable for building management systems (BMS), instrumentation, security, and audio control/sound system applications.

CONSTRUCTION :

Cores	8 Core
Section	16AWG
Conductor Material	Stranded Bare Copper (BC)
Insulation	Polyethylene (PE)
Colour	Black, Red, White, Green, Brown, Blue, Orange, Yellow
Cabling	Cores laid by twisting
Screen (100% Coverage)	Aluminium/Polyester
Drain Wire	Stranded Tinned Copper Wire
Rip Cord	Nylon Yarn
Sheath Material	Flame-Retardant Polyvinyl Chloride (PVC)
Sheath Color	Grey (RAL 7001)
Standard Put Up Length	305, 500 meters

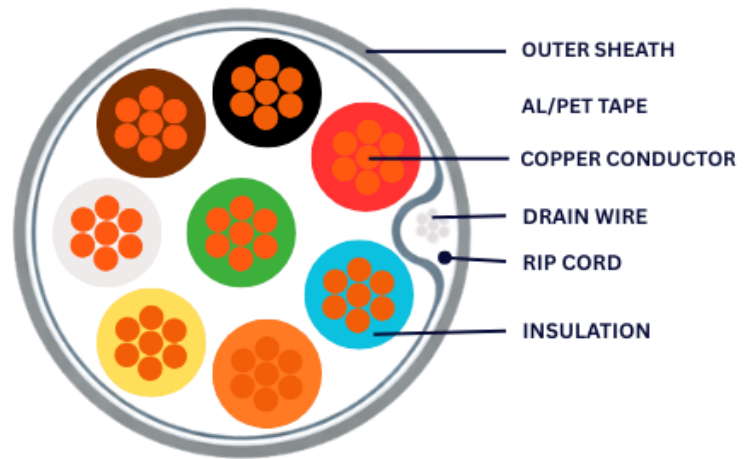

PHYSICAL & MECHANICAL CHARACTERISTICS

Operating Temperature (°C)	-25°C to +75°C
Nominal Cable Weight (kg/km)	122
Nominal Insulation Thickness (mm)	0.3
Nominal Sheath Thickness (mm)	0.5
Nominal Overall Diameter (mm)	7.8
Min. Bend Radius (install) (mm)	78
Max. Pull Tension (N)	1042

TECHNICAL DATA & STANDARD REFERENCES

(BS) EN 50290-2
IEC 60332-1-2 & IEC 60332-1-3
IEC 60228
RoHS Directives

ELECTRICAL CHARACTERISTICS

Capacitance Cond. To Cond.	69pF/m
Capacitance Cond. To Screen.	149pF/m
DC Resistance Conductor (Ω /km)	15.48 Ω /km
DC Resistance Screen (Ω /km)	78.6 Ω /km
Max. Recom. Current @ 25°C	4.35 (Amps)
Inductance	0.5 μ H/m
Operating Voltage	300 V (Vrms)

BELFAST ACCREDITED BY :

